

Product Number: **5150C**

Color	Clear
Material Thickness (no liner)	0.060 in. (1.5mm) ASTM D-3652
Tolerance	+/- 10%
Standard Length*	36 yds. (108 ft.) [33M]
Standard Log Width**	17.5 in. (450mm)
Carrier	Self Stick Acrylic Foam Adhesive Layer
Liner	Red Siliconized PE: 0.005" (0.13mm)
Core	White Plastic: 3 in. ID (76.2mm) 3.25 in. OD (82.55mm)




## Double Sided Acrylic Foam Tapes

*Superior Quality and Adhesive Bonding Power*

Extreme Bond® 5150C is a clear (transparent) 60mil thick double sided self-stick closed cell pressure sensitive acrylic adhesive tape. The 5150C has an extremely powerful initial tack and long-term holding capability, resists UV light, extreme temperatures & offers weather sealing abilities. The 5150C is often used to utilize it's clear as glass like appearance in a large range of applications.

### Material Structure

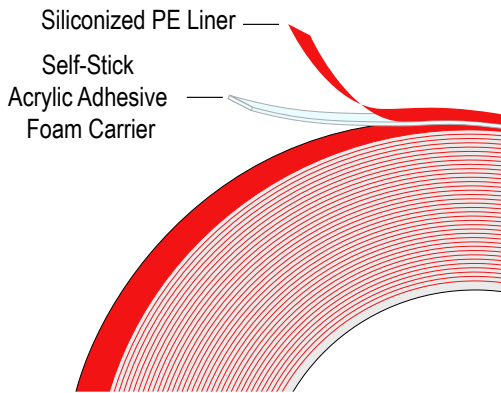

### 90° Adhesion:

Test Method: ASTM D-3330

Substrate Tested: Stainless Steel  
 Speed / Load: 12 inch per/minute  
 Tape Width: 1 inch  
 Test Result: 17 lbs. per/inch

### Dynamic Shear:

Test Method: ASTM D-1002

- 20min @ Room Temp. = 56.9 lbf/in<sup>2</sup>.
- 24 hours @ Room Temp. = 59.7 lbf/in<sup>2</sup>
- 48 hours @ Room Temp. = 64 lbf/in<sup>2</sup>
- 250 hours @ Room Temp. & 100% RH = 58.3 lbf/in<sup>2</sup>
- 250 hours @ 176°F = 72.5 lbf/in.
- 250 hours @ -4°F = 59.7 lbf/in.

### Static Shear:

Test Methods: ASTM D3654  
(Stainless Steel)

- (1.2677 in<sup>2</sup> overlap, held for 7 days)
- 73.4°F @ 3.3 lbs. for 7 days = Passed
  - 199.4°F @ 1.1 lb. for 7 days = Passed

### Temperature Resistance:

Cold	• Long Term: -40°F		Hot	• Short Term: 302°F
				• Long Term: 194°F

### Tensile Strength:

105 lb/in<sup>2</sup> Test Method: ASTM D-897

### Minimum Shelf Life:

12 months from the delivery date  
 (When stored in the original carton at 21°C (70°F) & 50% Relative Humidity.)

All products distributed by H&K Supplies, Inc. are guaranteed to be free from defect at the time of shipping when tested, according to H&K Supplies product specifications. The performance of the tape depends on many factors, but isn't limited to, the materials upon which the tape is being adhered to and the preparation of those materials. For the best performance use the manufacture's guidelines listed under "Application Guide" on our website, [www.hksuppliesinc.com](http://www.hksuppliesinc.com). The above figures are average values, established to our best knowledge and experience, but we recommend that you carry out your own tests to determine the suitability of specification purpose.

\* Available in longer lengths

\*\* Available in larger widths

Please contact your Sales Representative for further details.

